



LIVE TO PLAY LIVE®



M104 DISTORTION +



JIMDUNLOP.COM

92503016098revB

M104 DISTORTION +

DESCRIPTION


- Overdrive with just the right flavor of non-brittle signal breakup
- Organic, germanium-powered clipping
- Goes from subtle overdrive to fuzz-like saturation

POWER

The MXR Distortion+ is powered by one 9-volt battery (remove bottom plate to install), a 9-volt AC adapter such as the Dunlop ECB003/ECB003E, or a DC Brick™ power supply.

CONTROLS


- 1 OUTPUT knob controls overall volume of effect
- 2 DISTORTION knob controls amount of distortion
- 3 FOOTSWITCH toggles effect on/bypass (red LED indicates on)

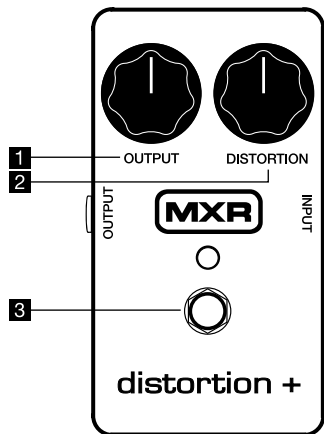

DIRECTIONS

- Run a cable from your guitar to the Distortion+'s INPUT jack and run another cable from the Distortion+'s OUTPUT jack to your amplifier.
- Start with all controls at 12 o'clock.
- Turn the effect on by depressing the footswitch.
- Rotate OUTPUT knob clockwise to increase overall volume of effect or counterclockwise to decrease it.
- Rotate DISTORTION knob clockwise to increase amount of distortion or counterclockwise to decrease it.

SAMPLE SETTINGS

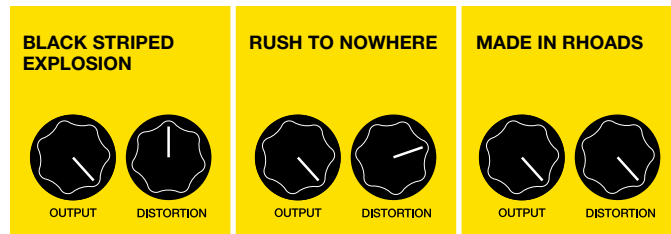

SPECIFICATIONS

Input Impedance	1 MΩ
Output Impedance*	25 kΩ
Nominal Input Level	-22 dBV
Maximum Output Level	-14 dBV
Noise Floor**	-74 dBV
Distortion Gain	10 dB to 45 dB, 1 kHz
Bypass	Hardwire
Current Draw	2.5 mA
Power Supply	9 volts DC

*Output control at mid position

**A-weighted, all controls at maximum clockwise position



DUNLOP MANUFACTURING, INC.
P.O. BOX 846 BENICIA, CA 94510 U.S.A.
TEL: 1-707-745-2722 FAX: 1-707-745-2658