




# RockBoard® HA 1

## Manual English

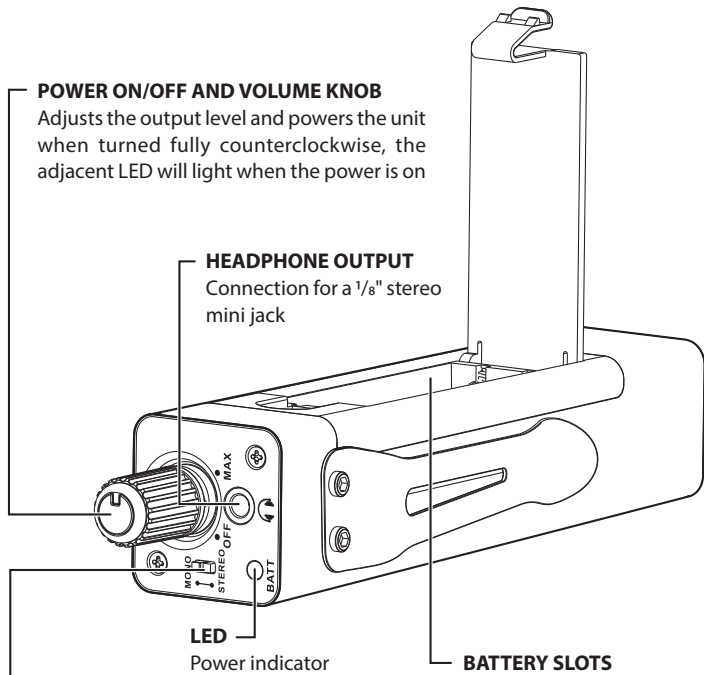


**POWER ON/OFF AND VOLUME KNOB**  
Adjusts the output level and powers the unit when turned fully counterclockwise, the adjacent LED will light when the power is on

**HEADPHONE OUTPUT**  
Connection for a 1/8" stereo mini jack

**LED**  
Power indicator

**BATTERY SLOTS**  
Compartment for two AAA batteries, pay attention to the correct polarity when inserting new batteries

**MONO/STEREO SWITCH**  
Set to Mono when used with a mixer's aux send or any other mono source, and set to Stereo when connected to a headphone output or other stereo source

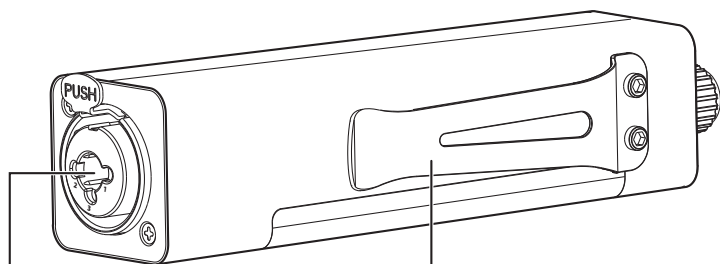

**INPUT JACK**  
XLR / 1/4" TRS combo input, receives your personal monitor mix signal, features a locking mechanism to prevent accidental mic cable disconnects

**BELT CLIP**  
Attaches to a belt or pant waistline

### Description

The RockBoard® HA 1 In-Ear Monitor Amplifier is the core of a high-quality personal monitoring system for musicians. This lightweight belt pack unit is designed for performers who remain in a relatively fixed position on stage. It provides professional sound quality and a high-volume, high-fidelity signal allowing users to hear their own voice and/or anything else they need to hear clearly on any stage or in any studio.

This In-Ear Monitor Amplifier can generate high sound pressure levels. Continued, unprotected exposure to these high sound pressure levels can cause permanent and irreversible hearing damage. If you notice hearing loss or ringing in your ears, consult a physician.

### Features & Functions

- Wired in-ear monitor amplifier solution for singers, keyboardists, drummers, guitarists, bassists, and other musicians
- Ultra-compact, lightweight design; aluminum housing
- XLR/TRS-combo input jack features a locking mechanism that prevents accidental XLR cable disconnects
- Mono/Stereo source switch
- Runs for up to 12 hours on two AAA batteries
- Level control powers the unit off when turned fully counterclockwise
- LED power indicator:
  - BLUE - high power, PINK - low power, RED - change batteries
- Convenient belt pack for easy volume control access and reliable connection to source
- 3.5 mm (1/8") stereo output jack for connecting your favorite in-ear-monitor, earphones or headphones

### Specifications

**Input**  
XLR / 6.35 mm (1/4") TRS locking combo jack

**Output**  
Type: 3.5 mm (1/8") TRS, Stereo jack  
Impedance: <0,1 Ω  
Max. output : 2 x 110 mW @ 16 Ω

**Power**  
Batteries or rechargeable batteries: 2 x AAA (not included)  
Battery life: ~12 hours (using alkaline micro batteries)

**Physical**  
Dimensions (L x W x H) incl. clip, jack & knob:  
141 x 30 x 36 mm (5<sup>35</sup>/64" x 1<sup>3</sup>/16" x 1<sup>27</sup>/64")  
Weight: 97 g / 0.21 lbs (without batteries)



Note: The manufacturer reserves the right to change these specifications without notice.