



# WO-518B


## Omni Condenser Microphone for Broadcasting and Programming

### Description

WO-518B series micro-mini collar microphones are hardly noticeable to audience, they are the best choice for theaters, TV broadcasting, video and movie miking. With a tailored frequency response plot, they can provide clear and exact performance.



### Features

- Electret condenser microphone.
- Omni-directional construction.
- Micro-miniature shape (Φ8 x 12 mm).
- High sonic pressure durability, wide dynamic range, low distortion.
- Reliable and easy-to-fix mesh windshield to reduce POP.
- WO-518B is equipped with 3.5 mm phone plug, applicable in wireless system.
- WO-518B/TQG is equipped with Tini Q-G (TA4F) plug, applicable in wireless system.
- WO-518B/XLR is equipped with one PS-418S power supply with XLR plug.
- WO-518BD/XLR is equipped with one PS-418D power supply (battery and phantom powered) with XLR plug.

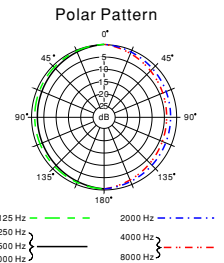

### Specifications (WO-518B/XLR)

- Type: Condenser Microphone
- Polar Pattern: Omni-directional
- Frequency Response: 20~20000Hz
- Sensitivity: -45dbV/pa (5.6mv/pa)
- Max SPL: 132dB
- Rated Impedance: 200Ω
- Power Supply: 9~52V Phantom Powered

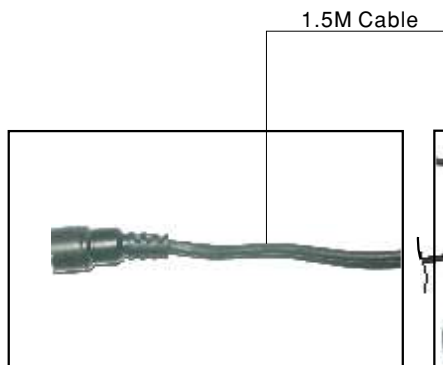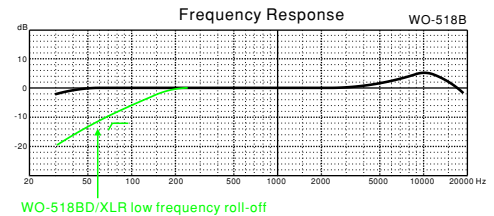

- ← 3.5mm (Phone Plug) WO-518B
- ← Tini Q-G (TA4F) plug WO-518B/TQG
- ← XLR Plug WO-518B/XLR
- ← Power supply with XLR plug (battery and phantom powered) WU-518BD/XLR



**GOANG-FANN CO., LTD.**  
 3F, No.7, Alley 2, Lane 342, Fu-Der 1st Road  
 Hsichih, Taipei, Taiwan

Tel: 886-2-26931323 Fax: 886-2-26948990  
 E-mail: sales@tenlux.com.tw  
 Http://www.superlux.com.tw